

This product is completed the lead-free and RoHS.



DATA SHEET


SAMWHA ELECTRIC CO., LTD.

Conductive Polymer Aluminum Electrolytic Capacitors

Date : 2016. 11. 17.

Ident-No : SC-ARD3244

Part No : FZ 1J 276 M 08119 VR

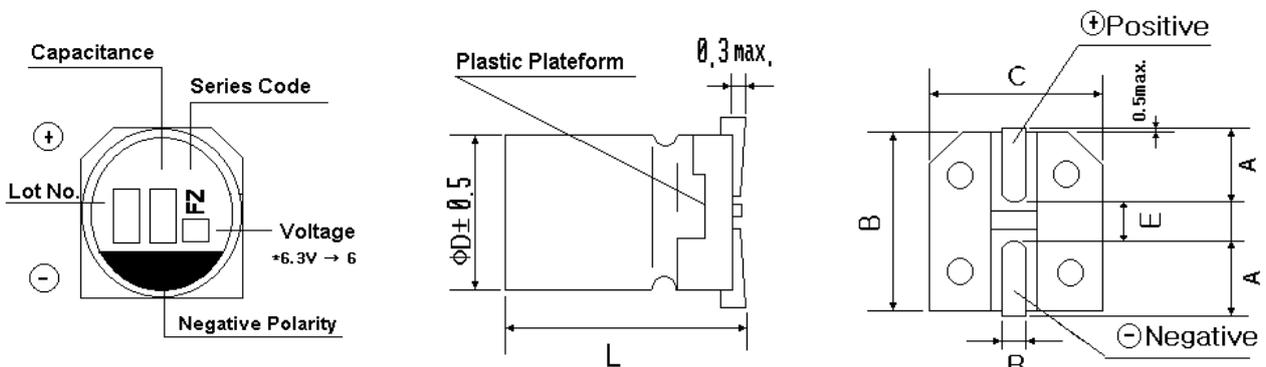

ΦD	$L \pm 0.3$	$B \pm 0.2$	$C \pm 0.2$	$E \pm 0.2$	$A \pm 0.2$	R
8	11.9	8.3	8.3	3.2	2.9	0.8~1.1

Dimensions of D & L

Capacitance at 120Hz, 20	27 μF
Tolerance at 120Hz, 20	-20% ~ +20%
Rated Voltage	63 V
Surge Voltage	72.4 V
Ripple current at 100kHz, 105	2000 mA rms
E.S.R max. at 20 100kHz	25 m
Leakage current after 1 minute	170 μA
Dissipation factor (tan δ) at 120Hz, 20	0.06
Temperature range	-55 ~ +105
Load life at 105	3000 hours

Approved G. H. Um

Technical team manager