


# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



For Display, 15000 hours at 105°C Series


- High reliability withstanding 15000 hours load life at 105°C
- For power supply and adapter
- Complied to the RoHS directive



Item	Characteristics																											
Operating temperature range	-40 ~ +105°C																											
Leakage current max.	I = 0.04CV+100μA (after 1 minutes) I = 0.02CV+25μA (after 5 minutes)																											
Capacitance tolerance	±20% at 120Hz, 20°C																											
Dissipation factor max. (at 120Hz, 20°C)	<table border="1"> <tr> <td>WV</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>420</td> <td>450</td> <td>500</td> </tr> <tr> <td>tanδ</td> <td colspan="3">0.20</td> <td colspan="6">0.24</td> </tr> </table>	WV	160	200	250	350	400	420	450	500	tanδ	0.20			0.24													
WV	160	200	250	350	400	420	450	500																				
tanδ	0.20			0.24																								
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>WV</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>420</td> <td>450</td> <td>500</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> <td>6</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>6</td> <td>6</td> <td>6</td> <td>6</td> <td>6</td> </tr> </table>	WV	160	200	250	350	400	420	450	500	Z-25°C/Z+20°C	3	3	3	3	6	6	6	6	Z-40°C/Z+20°C	4	4	4	6	6	6	6	6
WV	160	200	250	350	400	420	450	500																				
Z-25°C/Z+20°C	3	3	3	3	6	6	6	6																				
Z-40°C/Z+20°C	4	4	4	6	6	6	6	6																				
Load life	<p>After an application of DC bias voltage plus the rated AC ripple current for 15000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage. (where 12000 hours for Ø10)</p> <table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>tanδ</td> <td>Less than 200% of specified value</td> </tr> </table>	Leakage current	Less than specified value	Capacitance change	Within ±20% of initial value	tanδ	Less than 200% of specified value																					
Leakage current	Less than specified value																											
Capacitance change	Within ±20% of initial value																											
tanδ	Less than 200% of specified value																											
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																											

## ● DRAWING

Unit : mm

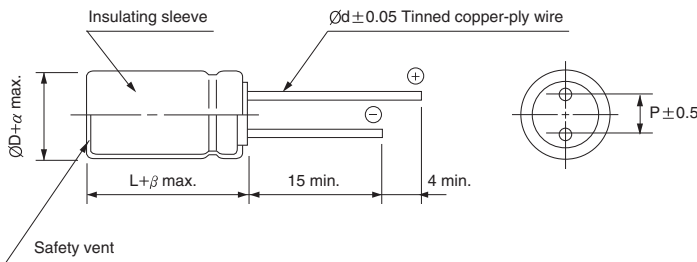

ØD	10	12.5	16	18	20
P	5.0	5.0	7.5	7.5	10.0
Ød	0.6	0.6	0.8	0.8	0.8
β	2.0		3.0		
α	0.5		1.0		

## ● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF \ Frequency	120Hz	1kHz	10kHz	50kHz	100kHz≤
10 ~ 82	1.00	1.75	2.25	2.35	2.50
100 ~ 470	1.00	1.67	2.05	2.15	2.25

## MP series

### ● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

$\mu\text{F}$ \diagdown WV	160		200		250		350	
10	10 × 12.5	110	10 × 12.5	110	10 × 12.5	160	10 × 16	149
15	10 × 12.5	150	10 × 12.5	150	10 × 16	220	10 × 20	197
22	10 × 12.5	243	10 × 16	243	10 × 20	240	12.5 × 20	297
27	10 × 16	264	10 × 20	280	10 × 20	270	12.5 × 20	314
33	10 × 16	270	10 × 20	308	12.5 × 20	323	12.5 × 25	325
39	10 × 20	320	10 × 25	350	12.5 × 20	354	12.5 × 30	352
47	10 × 20	369	12.5 × 20	440	12.5 × 25	460	16 × 20	451
68	12.5 × 20	480	12.5 × 25	594	12.5 × 30	610	16 × 31.5	623
82	12.5 × 25	525	16 × 20	616	16 × 25	680	18 × 25	688
100	12.5 × 25	575	16 × 25	717	16 × 31.5	717	18 × 31.5	817
120	12.5 × 30	670	16 × 25	785	16 × 31.5	804	18 × 35.5	924
	16 × 25	670						
150	16 × 25	825	16 × 31.5	813	16 × 35.5	902	18 × 40	1083
180	16 × 25	591	16 × 35.5	951	18 × 35.5	1012	18 × 45	1230
220	16 × 31.5	968	18 × 31.5	1100	18 × 40	1121		
	18 × 25	968						
270	16 × 35.5	1100	18 × 40	1290				
330	16 × 40	1231	18 × 45	1390				
	18 × 31.5	1231						
470	18 × 45	1626						

$\mu\text{F}$ \diagdown WV	400		420		450		500	
10	10 × 16	145	10 × 20	135	10 × 20	135	12.5 × 20	165
22	12.5 × 20	297	12.5 × 25	250	12.5 × 25	296	16 × 20	260
27	12.5 × 25	330	12.5 × 25	265	12.5 × 25	305	16 × 25	329
33	12.5 × 30	355	16 × 20	345	16 × 20	364	16 × 31.5	380
39	16 × 25	400	16 × 25	400	16 × 31.5	423	16 × 35.5	434
47	16 × 25	480	16 × 25	450	16 × 31.5	478	18 × 31.5	468
68	16 × 35.5	627	18 × 31.5	580	18 × 31.5	590	18 × 40	630
82	16 × 40	770	18 × 31.5	650	18 × 31.5	670	18 × 40	670
100	18 × 35.5	875	18 × 35.5	770	18 × 40	794	18 × 45	800
120	18 × 40	1000	18 × 45	900	18 × 45	940	18 × 50	920
150	18 × 45	1150						

Ripple current (mA rms) at 105°C, 120Hz  
 Case size  $\varnothing D \times L$  (mm)