Origin: Customer:

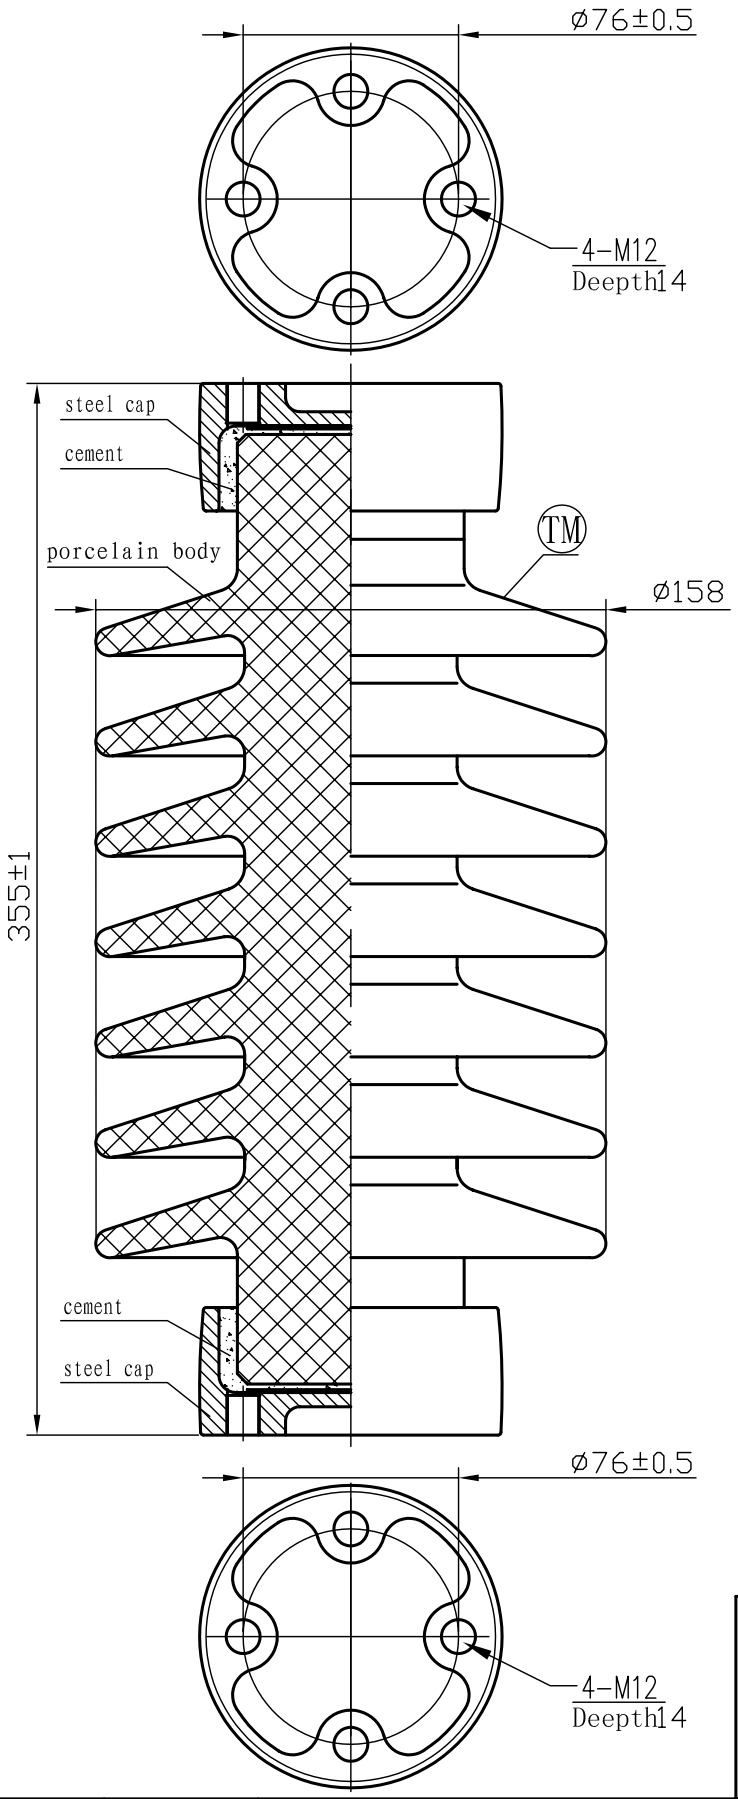


## ELECTRICAL PROPERTIES

Low Frequency Flashover Voltage
Wet: 75kV
Critical Impulse Flashover Voltage
Pos.: 170kV
Low Frequency Withstand Voltage
Wet: 60kV
Impulse Withstand Voltage: 150kV

## PHYSICAL PROPERTIES

| | |
|---|---|
| Creepage Distance: | 610mm |
| Nett weight | 11Kg |
| Gross | Kg |
| colour | Light Grey |

## MECHANICAL PROPERTIES

Cantilever Strength: 9kN
Tension Strength:45kN
Torsion Strength:900N.m
Compression Strength: 45kN

According to Standard Specification:
ANSI C 29.9 except drawing.

Year

# SUZHOU PORCELAIN INSULATORS

| | | | |
|---|---|---|---|
| Scale | 1:3 | SOLID-CORE STATION POST INSULATORS | Designation: TR-208 |
| Design | | | Cat. No. |
| Check | | | Drawing No. 34620 |
| Approve | | | Issue 1 |
| Date | | | |

| | | |
|---|---|---|
| Issue | modify | Design Approve |
| Issue | modify | Design Approve |